



## STN-94




- temperature meter with double display
- input: Pt100, Pt500, Pt1000
- 1 REL output
- threshold value setting
- RS-485 / Modbus RTU
- automatic recognition of 3 and 4-conductor connection
- signal peak value detection

The STN-94 meter is designed for temperature measurements and is particularly suitable in applications which require quick access to the threshold value with a possibility of its instant modification during measurements. 3 [^] keys enable quick changing of any set value digit, which significantly reduces the time necessary to input a new parameter value. The device is equipped with one resistance-type Pt100/500/1000 input. The inputs feature with fully linearized characteristics. The 24V DC / 100mA output is designed to supply measuring transducers, and the RS-485 port enables data transmission in production process monitoring systems. The REL / OC control output can adjust the level of measured signal and are controlled according to threshold value.


### TECHNICAL DATA

Power supply	19V ÷ 50V DC; 16V ÷ 35V AC or 85 ÷ 260V AC/DC or 12V AC/DC, all separated
Power consumption	for 12V AC/DC, 85 ÷ 260V AC/DC and 16V ÷ 35V AC power supply: max. 4.5 VA; for 19V ÷ 50V DC power supply: max. 4.5 W
Display	result (PV): LED, red, 3 digits, 13mm high, brightness adjustable in 8 steps settings (SV): LED, green, 3 digits, 13mm high, brightness adjustable in 8 steps
Measuring range	-99°C ÷ 600°C
Input	thermoresistance Pt100, Pt500, Pt1000 (automatic recognition of 3 and 4-conductor connection, resistance compensation of connecting conductors from 0 to 20 Ω at any conductor)
Resolution	0,1°C
Accuracy	0,1% @ 25°C ± one digit
Stability	50 ppm/°C
Outputs (option)	1 x REL I <sub>max</sub> = 1A, U <sub>max</sub> = 30VDC/250VAC (cosφ=1) or OC I <sub>max</sub> = 30mA, U <sub>max</sub> = 30VDC, P <sub>max</sub> = 100mW
Power supply output	24V DC +5%, -10% / max. 100mA, stabilized
Communication interface	RS-485, 8N1 and 8N2, 1200 bit/s ÷ 115200 bit/s, Modbus RTU (not galvanically isolated)
Operating temp.	0°C ÷ +50°C (standard), -20°C ÷ +50°C (option)
Storage temp.	-10°C ÷ +70°C (standard), -20°C ÷ +70°C (depending on option)
Protection class	IP 65 (front), optional integrated frame for panel cut-out sealing; IP 20 (case and connection clips)
Case	panel mounting; material: NORYL - GFN2SE1
Dimensions	case (WxHxD): 96 x 48 x 100mm panel cut-out dimensions: 90.5 x 43mm installation depth: min. 102mm board thickness: standard 7mm or other depending on used board thickness brackets (see Accessories)
Weight	215 g max.

**DIMENSIONS**

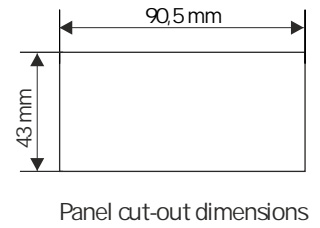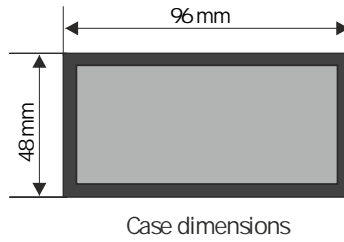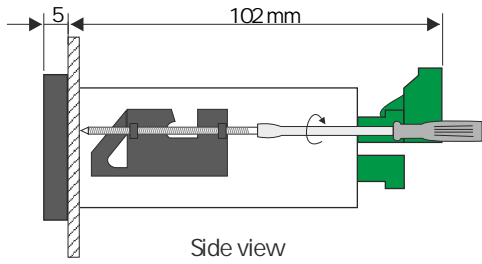

**EXAMPLARY PIN ASSIGNMENTS**

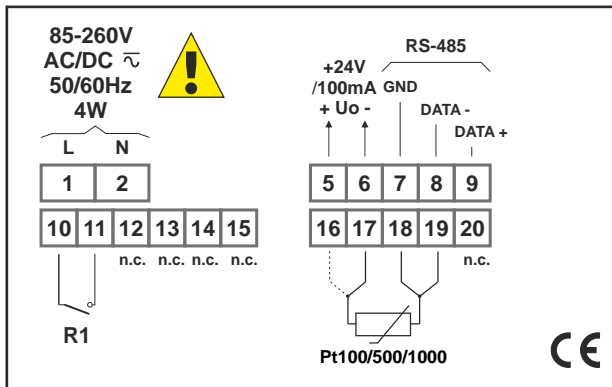

**ORDERING**

STN-94-1311-1-X-XX1

options


- 00 : no options
- 01 : integrated frame for panel cut-out sealing
- 08 : operating temp. -20°C ÷ +50°C
- 0P : integrated frame for panel cut-out sealing  
+ operating temp. -20°C ÷ +50°C

power supply:


- 3 : 24V AC/DC
- 4 : 85V ÷ 260V AC/DC
- 5 : 12V AC/DC



## MOUNTING PLATES

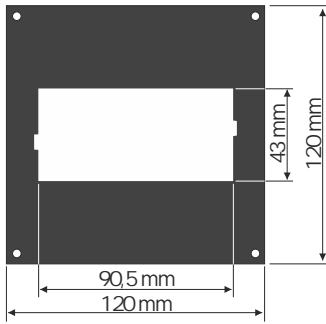

SMP-99/94  
to mount 96 x 48 mm  
size unit in place  
of 96 x 96 mm cut-out

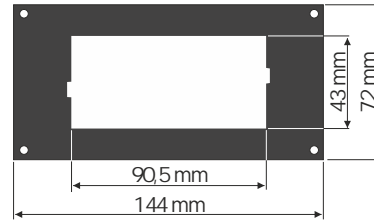

SMP-147/94  
to mount 96 x 48 mm  
size unit in place  
of 144 x 72 mm cut-out

## BOARD THICKNESS BRACKETS / ADAPTORS



SPH-07  
1 ÷ 7 mm board thickness  
brackets (2 pcs)  
standard included with device



SPH-45  
1 ÷ 45 mm board thickness  
brackets (2 pcs)




SPH-05  
1 ÷ 5 mm board thickness  
brackets (2 pcs)



SRH-94  
brackets for mounting devices  
on DIN 35/7.5 or 15 rail (2 pcs)

## SOFTWARE

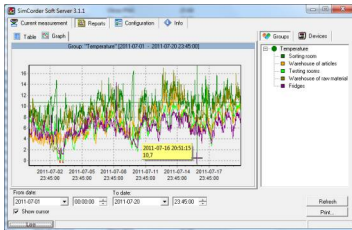

SimCorder Soft is a visualisation application created to facilitate work with advanced networks of the SIMEX devices, for acquisition, visualisation, reporting, archiving, exporting and printing of measurement data from all network devices. You can download measurements from the devices automatically or on demand. There is a possibility of immediate notification about emergency states via SMS or e-mail, which will often allow to quickly resolve an arising problem while avoiding long and expensive stoppages. You can view the measurement data, emergency states and configuration via the internet at every time.

## CONVERTERS



The SRS-U4 module is designed to connect a USB host to slave devices equipped with RS-485 interface. The PC with special software can be used as a host. The SRS-U4 unit guarantees full galvanic isolation between USB and RS-485 circuits. The converter can work with any devices equipped with RS-485 interface and contains integrated circuit which supports USB 1.1 and USB 2.0 standards. The main purpose is connection of PC host computer with industrial data acquisition and visualisation systems based on RS-485 interface.

The SRS-U4 can be also manufactured with DIN mounting adaptor.

