

CCA-K-387



- pressure transmitter
- nominal pressure: from 0..100 mbar up to 0..40 bar
- output signals: 2-wire: 4...20 mA; 3-wire: 0..10V
- ceramic sensor
- diaphragm 99.9 % Al₂O₃
- accuracy 0.35% / 0.25% span
- high long-term stability

The pressure transmitter CCA-K-387 has been specially designed for applications in plant and machine engineering as well as laboratory techniques and is suitable for measuring small system pressure and filling heights.

By using our own-developed capacitive sensor, available in Al₂O₃ 99.9%, the CCA-K-387 offers a high overpressure resistance and a high temperature and media resistance.

PREFERRED AREAS OF USE ARE



Plant and Machine Engineering



Laboratory Techniques



Aggressive media



Water

TECHNICAL DATA

Input pressure range														
Nominal pressure gauge [bar]	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	25	40
Level [mH ₂ O]	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250	400
Overpressure [bar]	3	4	5	5	5	7	7	12	12	20	20	20	40	70
Burst pressure [bar]	4	6	8	8	8	9	9	18	18	25	30	30	45	80
Permissible vacuum [bar]	-0.2	-0.3				-0.5					-1			

Output signal / Supply	
Standard	2-wire: 4 ... 20 mA / V _S = 14 ... 36 V _{DC}
On request	3-wire: 0 ... 10 V / V _S = 14 ... 36 V _{DC}
Performance	
Accuracy ¹	standard: ± 0.35 % span option: ± 0.25 % span others on request
Permissible load	current 2-wire: R _{max} = [(V _S - V _{S min}) / 0.02 A] W voltage 3-wire: R _{min} = 10 kW
Influence effects	supply: 0.05 % span / 10 V load: 0.05 % span / k
Long term stability	± 0.1 % span / year
Turn-on time	450 msec
Mean response time	70 msec
Measuring rate	80 Hz

¹ accuracy according to EN IEC 62828-2 - limit point adjustment (non-linearity, hysteresis, repeatability)

Thermal effects (offset and span)	
Tolerance band	± 1 % span
In compensated range	-20 ... 80 °C
Permissible temperatures	
Medium ²	-40 ... 125 °C
Electronics / environment	-40 ... 85 °C
Storage	-40 ... 85 °C







² for pressure port in PVDF the operation medium temperature is -30 ... 60 °C and in PP-HT 0 ... 60 °C

Electrical protection	
Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326




Mechanical stability			
Vibration	10 g RMS (25 ... 2000 Hz)		according to DIN EN 60068-2-6
Materials			
Pressure port / housing	standard: options for G3/4" flush:	pressure port stainless steel 1.4404 (316 L) PVDF ($p_{max} = 20$ bar) PP-HT ($p_{max} = 10$ bar)	housing stainless steel 1.4404 (316 L) PVDF PP-HT
Option compact field housing	stainless steel 1.4301 (304) cable gland M12x1.5, brass, nickel plated (clamping range 2 ... 8 mm)		
Seals (O-rings)	FKM, EPDM, FFKM		
Diaphragm	ceramics Al_2O_3 99.9 %		
Media wetted parts	pressure port, seals, diaphragm		
Miscellaneous			
Current consumption	max. 22 mA		
Weight	approx. 180 g		
Operational life	100 million load cycles		
CE-conformity	EMC Directive: 2014/30/EU		





ELECTRICAL CONNECTION

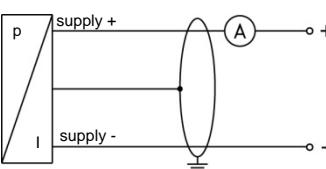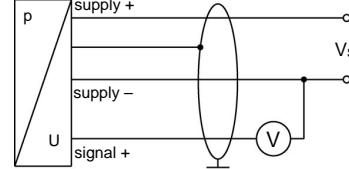Wiring diagram					
2-wire-system (current)			3-wire-system (current / voltage)		
					
Pin configuration					
Electrical connection					cable colours (DIN 47100)
Supply +	1	3	1	Vs +	wh (white)
Supply -	2	4	2	Vs -	bn (brown)
Signal + (only for 3-wire)	3	1	3	S +	gn (green)
Shield	ground contact 	5	4	GND	ye/gn (yellow / green)

standard









options



⁴ standard: 2 m PVC-cable without ventilation tube (permissible temperature: -5 ... 70°C), optional cable with ventilation tube

⁵ different cable types and lengths available, permissible temperature depends on kind of cable

DIMENSION DRAWINGS

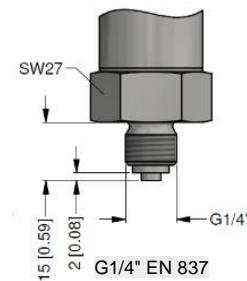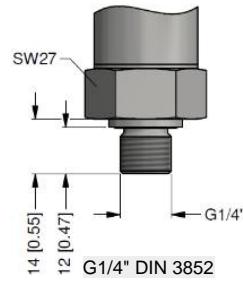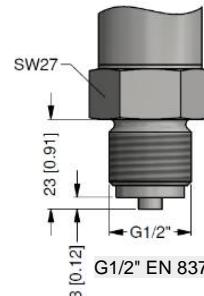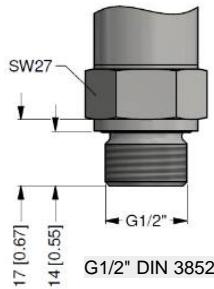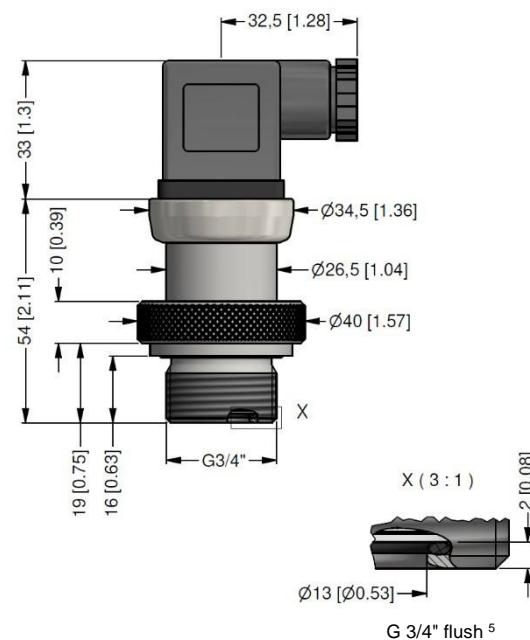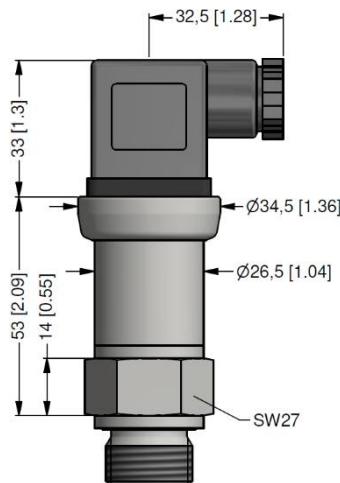

ORDER CODE

CCA-K-387- - - - - - - -

Pressure

Gauge in bar

Gauge in mH₂O

Input [mH ₂ O]	[bar]	
0 ... 1	0 ... 0,1	1 0 0 0
0 ... 1,6	0 ... 0,16	1 6 0 0
0 ... 2,5	0 ... 0,25	2 5 0 0
0 ... 4	0 ... 0,4	4 0 0 0
0 ... 6	0 ... 0,6	6 0 0 0
0 ... 10	0 ... 1	1 0 0 1
0 ... 16	0 ... 1,6	1 6 0 1
0 ... 25	0 ... 2,5	2 5 0 1
0 ... 40	0 ... 4	4 0 0 1
0 ... 60	0 ... 6	6 0 0 1
0 ... 100	0 ... 10	1 0 0 2
0 ... 160	0 ... 16	1 6 0 2
0 ... 250	0 ... 25	2 5 0 2
0 ... 400	0 ... 40	4 0 0 2

Customer

Output

4 ... 20 mA / 2-wire

1

0 ... 10 V / 3-wire

3

Customer

9

CCA-K-387- [] - [] - [] - [] - [] - [] - [] - [] - [] - []

Accuracy

Standard 0.35 % FSO	3
Option 0.25 % FSO	2
Customer	9

Electrical connection

Connector DIN 43650 (ISO 4400) (IP 65)	1	0	0
Connector Binder 723 5-pin (IP 67)	2	0	0
Cable outlet, cable with ventilation tube (IP 68) ¹	T	R	0
+ PVC cable / 1 m			
Cable outlet with PVC cable (IP67) ²	T	A	0
+ PVC cable / 1 m			
Connector M12 x 1, 4-pin (IP 67) - metal	M	1	0
Field housing stainless steel 1.4301 (304)	8	5	0
Customer	9	9	9

Mechanical connection³

G 1/2" DIN 3852	1	0	0
G 1/2" EN 837	2	0	0
G 1/4" DIN 3852	3	0	0
G 1/4" EN 837	4	0	0
G 3/4" with flush sensor ⁴	K	0	0
Customer	9	9	9

Seals

Viton (FKM)	1
EPDM ($P_N < 160$ bar)	3
FFKM	7
Customer	9

Pressure port

Stainless steel 1.4404 (316 L)	1
PVDF ($P_N = 60$ bar) only with G 1/2" DIN 3852 open port H00 ⁵	B
PP-HT ($P_{max} = 10$ bar) ⁵	R
Customer	9

Diaphragm

Ceramics Al ₂ O ₃ 99.9 %	C
Customer	9

Special version

Standard	0	0	0
Customer	9	9	9

1 - standard: 2 m PVC cable without ventilation tube (permissible temperature: -5 ... 70 °C); others on request

2 - code TR0 = PVC cable, cable with ventilation tube available in different types and lengths; cable not included in the price

3 - metric threads and others on request

4 - not in combination with field housing

5 - only for mechanical connection G3/4"; for pressure port in PVDF the operation medium temperature is -30 ... 60 °C and in PP-HT 0 ... 60 °C

Manufacturer reserves the right to change sensor specifications without further notice.

